

HUBERT

amp up your process

Datasheet



A1110-05-A

4-Quadrant Voltage Amplifier
DC - 1 MHz



1 Product Description

The A1110-05-A is a linear, extreme-broadband, precision power amplifier designed for all applications which require fast-changing signals with high performance.

Three selectable operating voltages per polarity are available for high voltage/low current or low voltage/high current applications. Voltage switching is manual. Especially for very low impedance loads, the operating voltage can be reduced to a 1/3, which results in a corresponding reduction of power dissipation.

The device is equipped with a temperature-controlled, quietly-running fan. An over-temperature disconnection, a power-loss calculation and an absolute-current monitoring guarantee perfect short-circuit and overload protection. An interlock offers the possibility of a remote-controlled security system. The operation is implemented over the operating elements on the front panel and over the USB interface by PC with a graphical user interface.

The device's functionality can even be extended by several product options.

Please find the latest release of this datasheet on our website:
www.drhubert.com



2 Features

- 4-quadrant voltage amplifier
- Fully configurable and operable by means of the supplied software
- Output voltages up to $75 V_{\text{peak}}$
- Output current up to $11 A_{\text{peak}}$
- Symmetrical input
- Series / parallel input connection in case of higher voltage / current requirements
- USB port as standard
- 2 supply voltages


3 Applications

- General lab applications for research, development and testing
- EMC testing
- Material testing
- MRI
- Component tests
- Plunger coil drives
- Piezo actuation
- Generation of magnetic fields (e.g. with Helmholtz coils)
- Medical engineering
- Laser technology
- Plasma technology



4 Control Software

The device includes an application software that ensures fully remote-controlled operation and comprehensive configuration of the amplifier via the USB interface. A trouble-free integration to existing automated test systems is guaranteed by a complete remote command list.

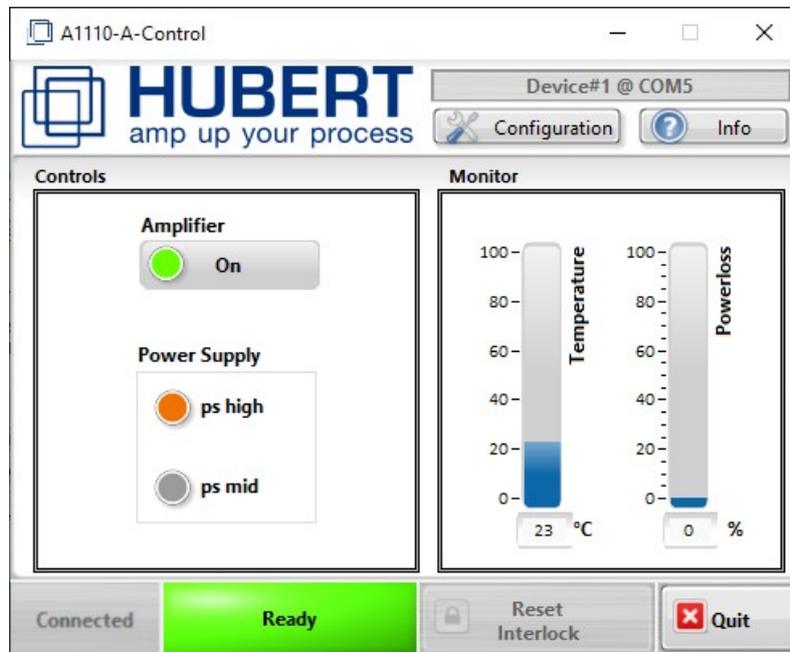

5 Pictures





6 Specifications

Parameters	Specification	Conditions/Moments
	Controlled Voltage Mode	25° C ambient temperature
		Continuous operation
Input Impedance	100 kOhm	unbalanced, 1kHz
	200 kOhm	balanced, 1kHz
Maximum Input Level	5.5 V (+14,5 dBV)	< 1 % THD, 1 kHz, 8 Ohm Load
Gain	1 V / 10 V; $\pm 0.1 \%$ ($\pm 0.01 \%$ / °C)	Uin/Uout
Common-Mode Rejection Ratio	>60 dB	Rs=50 Ohm, 10 Hz – 200 kHz, re +34.5 dBV @ Output
Small Signal Frequency Response	DC - 200 kHz	+0, -0.5 dB, 1 W @ 8 Ohm High Voltage Mode
	DC - 900 kHz	+0, -3.0 dB, 1 W @ 8 Ohm High Voltage Mode
	DC - 1 MHz	+0, -3.0 dB, no-load High Voltage Mode
Phase response	+0, -5 degrees	10 Hz - 30 kHz
Power Response (continuous)		
8 Ohm Load	300 W	DC - 30 kHz, < 0.1% THD High Voltage Mode
	200 W	DC – 200 kHz, < 1% THD High Voltage Mode
3 Ohm Load	180 W	DC - 30 kHz, < 0.1% THD Low Voltage Mode
	100 W	DC - 200 kHz, < 0.5% THD Low Voltage Mode
Slew Rate	100 V/uSec	
Residual Noise		
10 Hz - 22 kHz	< 64 uV (< -84 dBV)	High Voltage Mode Input shorted 8 Ohm Load
10 Hz - 80 kHz	< 141 uV (< -77 dBV)	High Voltage Mode Input shorted 8 Ohm Load
10 Hz - 200 kHz	< 177 uV (< -75 dBV)	High Voltage Mode Input shorted 8 Ohm Load
10 Hz - 22 kHz	< 64 uV (< -84 dBV)	Low Voltage Mode Input shorted 8 Ohm Load
10 Hz - 80 kHz	< 178 uV (< -75 dBV)	Low Voltage Mode Input shorted 8 Ohm Load



Parameters	Specification	Conditions/Moments
10 Hz - 200 kHz	< 282 μ V (< -73 dBV)	Low Voltage Mode Input shorted 8 Ohm Load
Signal-to-Noise Ratio		
10 Hz - 22 kHz	< -118.5 dB	re +34.5 dBV, < 1% THD 8 Ohm Load High Voltage Mode
10 Hz - 80 kHz	< -111.5 dB	re +34.5 dBV, < 1% THD 8 Ohm Load High Voltage Mode
10 Hz - 200 kHz	< -109.5 dB	re +34.5 dBV, < 1% THD 8 Ohm Load High Voltage Mode
THD+N		
10 Hz - 30 kHz High Voltage Mode	< 0.02 %	1 W @ 8 Ohm
10 Hz - 100 kHz High Voltage Mode	< 0.02 %	1 W @ 8 Ohm
10 Hz - 30 kHz Low Voltage Mode	< 0.03 %	1 W @ 8 Ohm
10 Hz - 100 kHz Low Voltage Mode	< 0.03 %	1 W @ 8 Ohm
Output Offset		
	< 1.0 mV	adjustable to less than 1mV
Output Impedance		
	< 10 mOhm	@1 kHz; Instrument: HP8751A, Network Analyzer
Power, Pulse, 40ms, 20% Duty Cycle		
Peak output		
8 Ohm	76 V, 9.5 A	High Voltage Mode
3 Ohm	33 V, 11 A	Low Voltage Mode
2 Ohm	22 V, 11 A	Low Voltage Mode
1 Ohm	11 V, 11 A	Low Voltage Mode
0.5 Ohm	5 V, 10 A	Low Voltage Mode
Power, Sinus, 100Hz, continuous		
1 Ohm	8.5 V, 8.5 A, 72 W	< 0.1 % THD Low Voltage Mode
0.5 Ohm	4 V, 8 A, 32 W	< 0.1% THD Low Voltage Mode
Power, DC		
10 Ohm	72 V, 7.2 A, 518 W	High Voltage Mode
3 Ohm	33 V, 11 A, 363 W	Low Voltage Mode
2 Ohm	23 V, 11.5 A, 264.5 W	Low Voltage Mode
1 Ohm	11.5 V, 11.5 A, 132 W	Low Voltage Mode
0.5 Ohm	5 V, 10 A, 100 W	Low Voltage Mode
Sink Power, DC		
	90 W	Low Voltage Mode; see U/I-Plot




Parameters	Specification	Conditions/Moments
Physical Characteristics		
AC Power	230 VAC / 50 Hz	
Remote control	USB	
Operating Temperature	10 °C to 55 °C	
Humidity	80% or less	non-condensing
Cooling	Forced air	
Dimensions (W x H x D)	449 x 133 x 435.5 mm	
Weight	Approx. 14 kg	




6.1 Output Voltage vs. Frequency (THD + N < 1%)

Red: @ 8 Ohm
Blue: @ 4 Ohm
Green: @ 2 Ohm

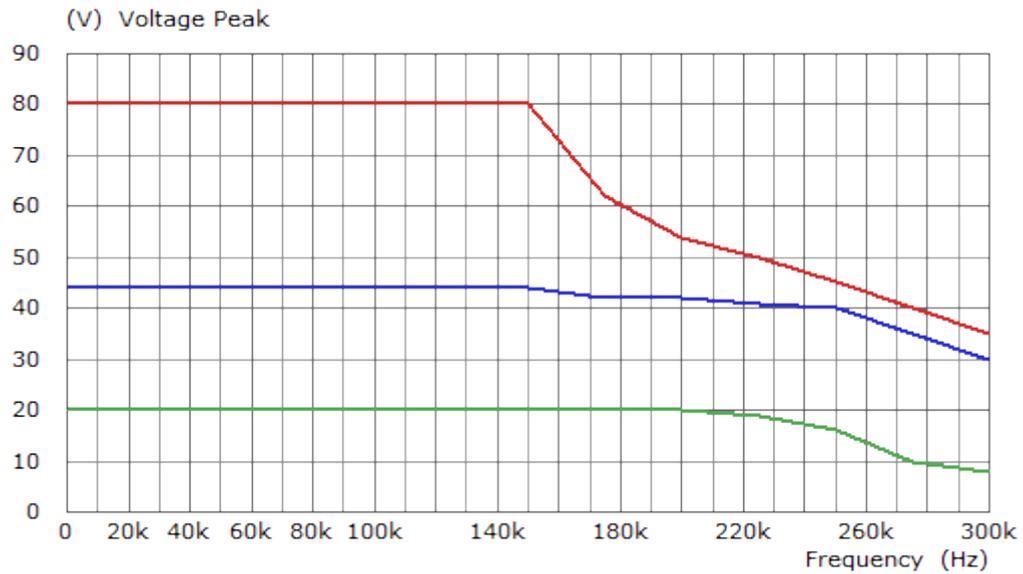

6.2 Output Current vs. Output Voltage (THD + N < 1%)

Supply Voltage: Low
Blue: AC Limit
Red: DC Limit

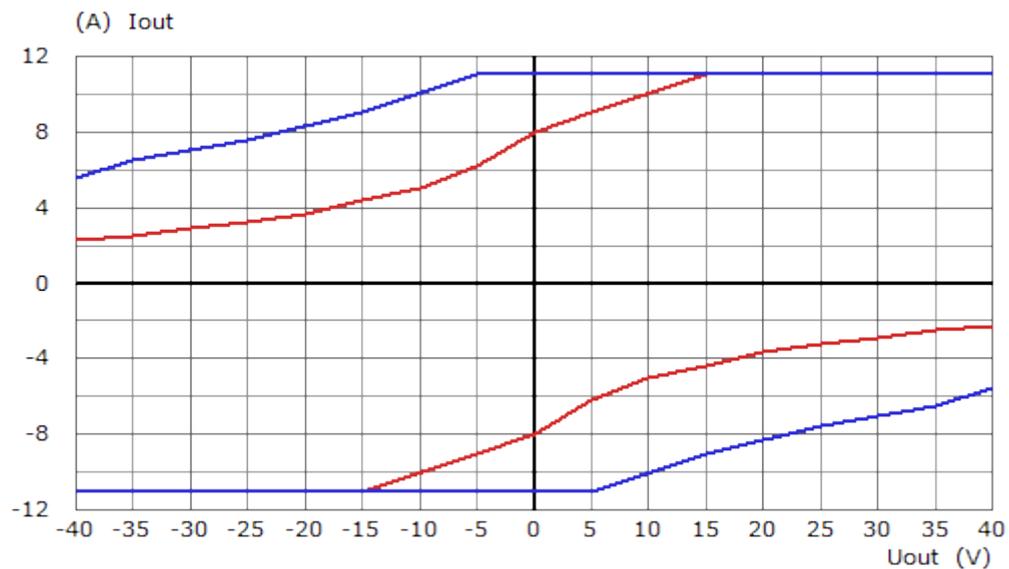




6.3 Output Current vs. Output Voltage (THD + N < 1%)


Supply Voltage: High

Blue: AC Limit

Red: DC Limit

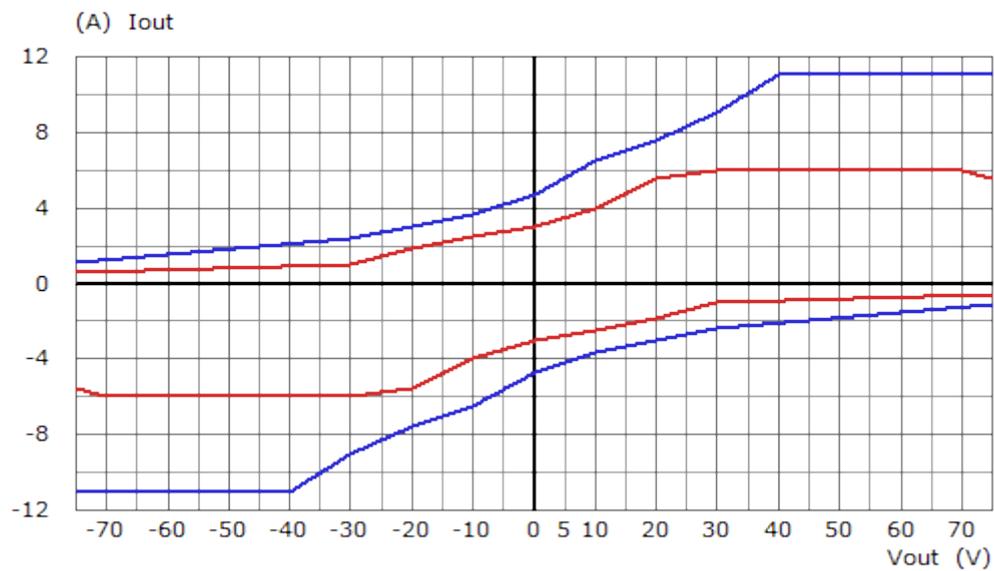


6.4 Square Wave at 100 kHz and 10 Ohm Load

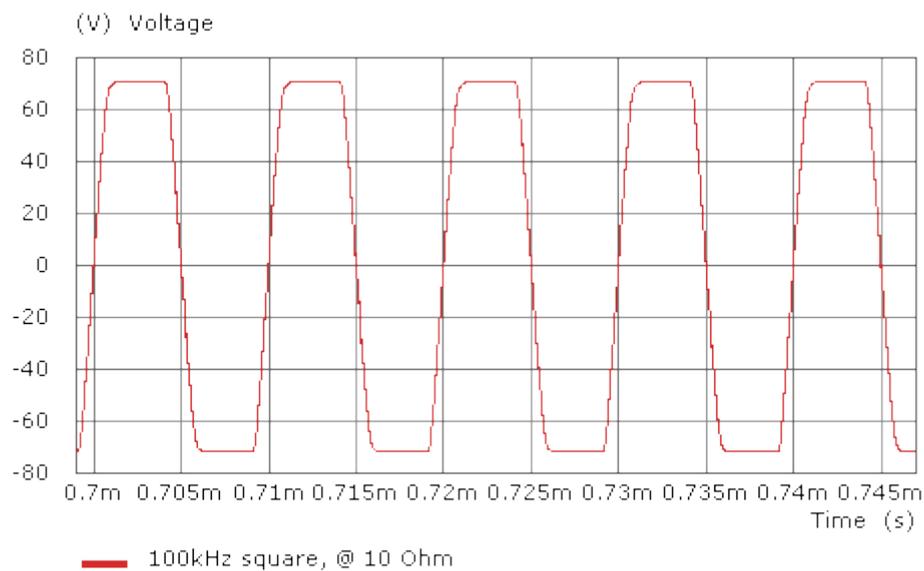




6.5 Power Bandwidth at 8 Ohm Load

Input level normalized to max. output level at 200 kHz; THD+N < 1%

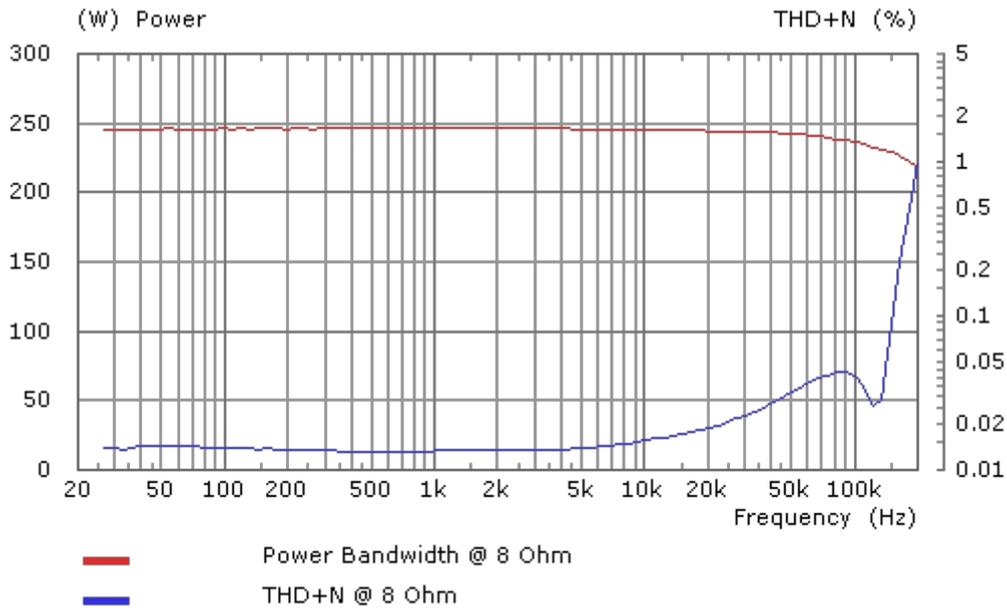


6.6 Power Bandwidth at 3 Ohm Load

Input level normalized to max. output level at 200 kHz; THD+N < 1%

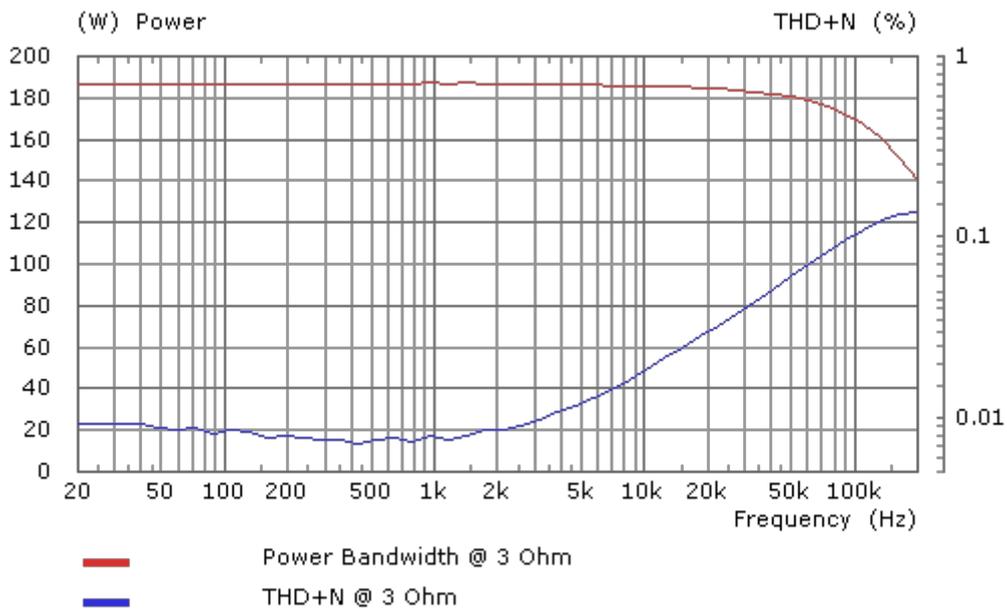




6.7 Output Impedance

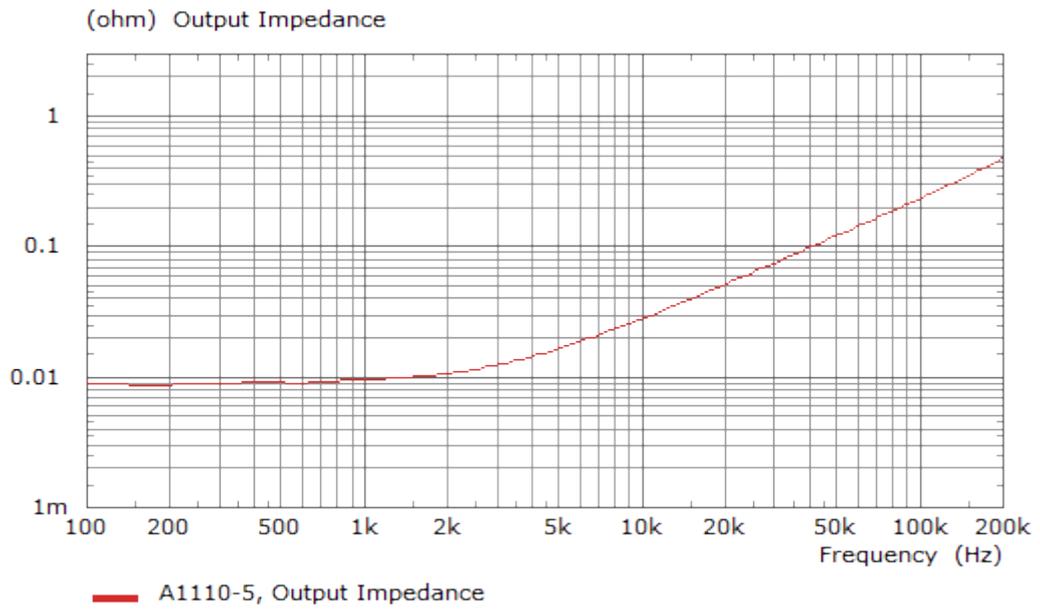



7 Block Diagram

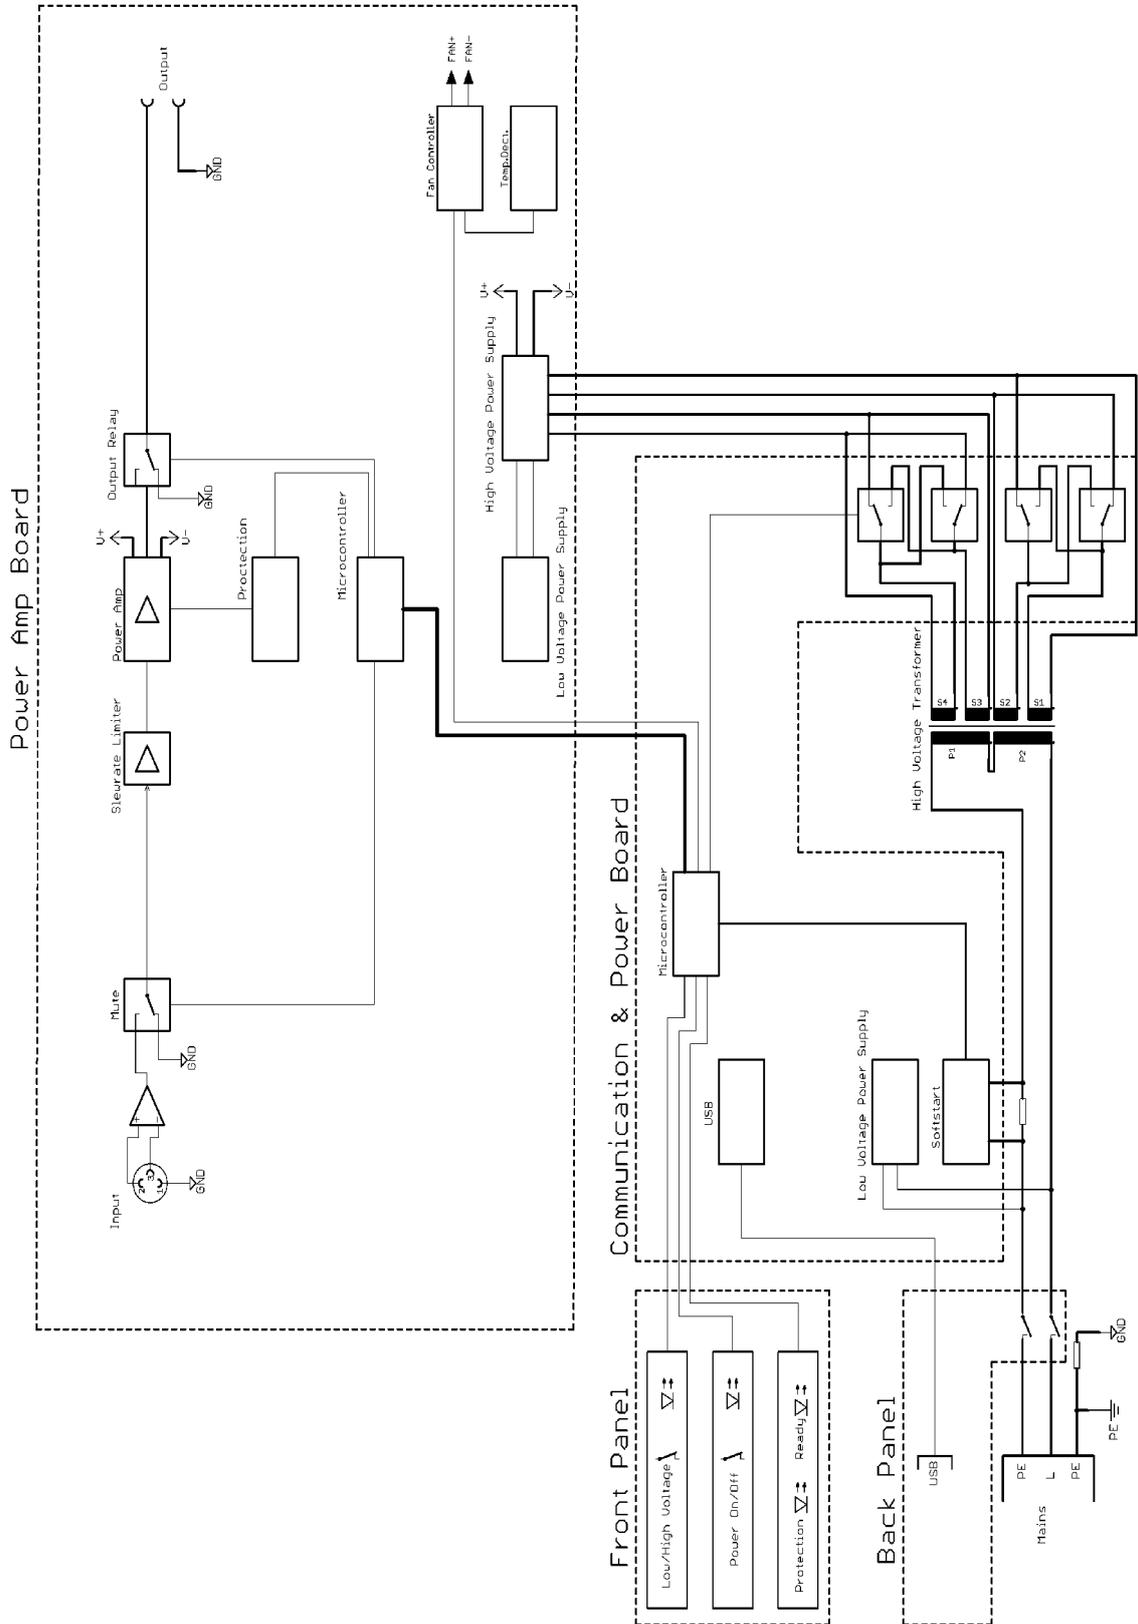



8 Product Options

The following product options are available at the time of placing the order. Upgrades of existing devices are not possible.

Article Name	Article Description	Order Number
A1110-05-A	4-Quadrant Voltage Amplifier	11100010
Option_02: Internal Current Measurement	High-performance current transformer; Precision DC +/-0.1%; Output BNC bush, galvanically isolated from the amplifier	11101020
Option_03: Ultra Stable Gain	Gain $10 \pm 0,1\%$ ($\pm 25\text{ppm}/\text{C}^\circ$); Offset $\pm 1\text{mV}$ ($\pm 25\text{uV}/\text{C}^\circ$)	11101030
Option_05: Isolation Amplifier	For potential isolation of input and output	11101050
Option_09: 100 V Output Voltage	Output Voltage up to $\pm 100\text{V}$	11101090
Option_13: Ethernet Interface	For connection to a computer (RJ45)	11101130
Option_16: Sensing	Adjustable voltage drop: 500mV / 1V / 2V	11101230

9 Contact

Dr. Hubert GmbH
Dietrich-Benking-Str. 41
44805 Bochum - Germany
Tel. +49 234 970569-0
Fax. +49 234 970569-29
service@drhubert.de

Further information is available on our website www.drhubert.com.



10 Document History

Revision	Date	Changes
2.0	March 2020	First publication in new layout